

# EPAL Nailer



Industrial coil nailer

## CN100

## EPAL

drives 70~90mm (2<sup>3</sup>/<sub>4</sub>"~3<sup>1</sup>/<sub>2</sub>")  
wire collated e-pal nails



### FEATURES

- Most powerful tool in its class, able to countersink nails into Hard Oak pallet



- Durable aluminum Frame & Cylinder Cap

- Downwards directional exhaust



- Well balanced when hung on Balancer



- Built-in silencer to reduce noise level

- Comfortable rubber grip

- Big magazine allows extra nail capacity

### APPLICATIONS




- heavy-duty Euro pallet

### TOOL SPECIFICATIONS

MODEL	CN100EPAL
WEIGHT	5.6kg(12.34lbs)
DIMENSIONS	457(H) x 156(W) x 336(L)mm 18" x 6-1/8" x 13-1/4"
LOAD CAPACITY	150~300 nails (Wire welded nails)
OPERATING PRESSURE	5~7kg/cm <sup>2</sup> (Regulator)
AIR CONSUMPTION	3.48l/cycle at 6 bar(90p.s.i.) operating pressure
NOISE	A-weighted single-event sound power level <b>LWA, 1s, d 103.32 dB</b> A-weighted single-event emission sound pressure level at work station <b>LpA, 1s, d 91.79 dB</b> These values are determined and documented in accordance to CEN/TC 255 WG 1 N 45.3 E. (EN-standard in preparation)
VIBRATION	Vibration characteristic value = 4.5m/s <sup>2</sup> These values are determined and documented in accordance to ISO 8662-11

### FASTENERS APPLICABLE

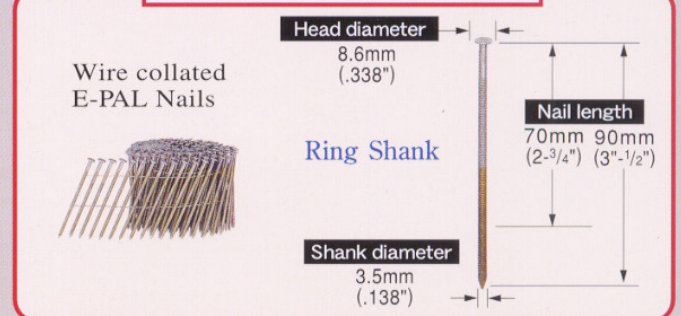

The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.



**MAX CO.,LTD.**

6-6 NIHONBASHI HAKOZAKI-CHO, CHUO-KU, TOKYO, JAPAN  
PHONE: 81-3-3669-8131 FAX: 81-3-3669-7104  
Web: <http://www.max-ltd.co.jp/int/>

Distributor:



Printed on  
Recycled Paper

PRINTED IN JAPAN  
OS7113AN T0111